


Vunit 3000

Intelligent Central Control Server

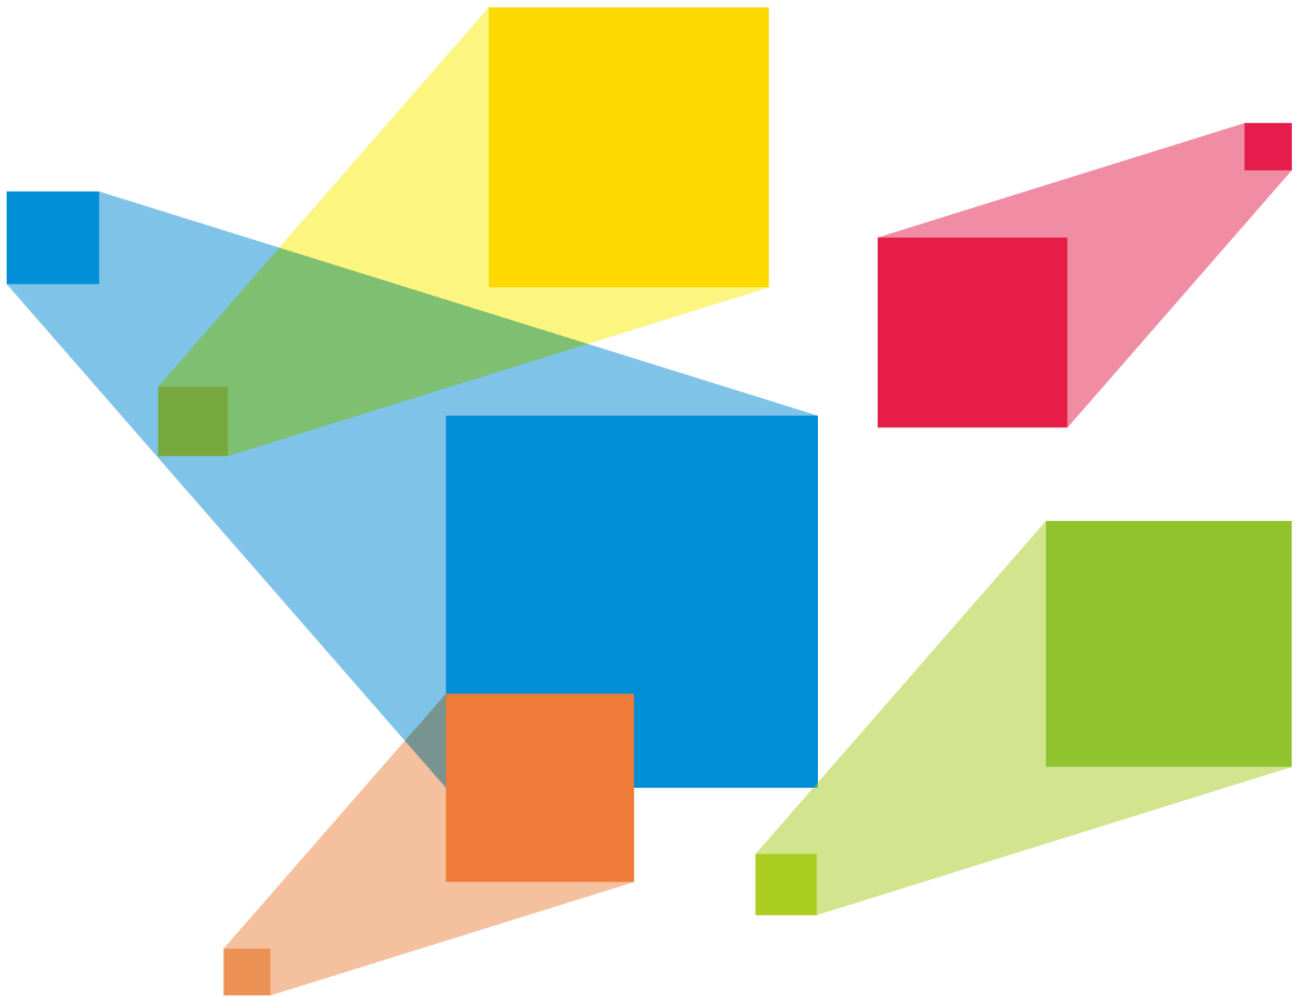

Specifications

Introduction

The Vunit3000 intelligent central control server is a programmable central control system with a plug-in design. It can be controlled via phones, tablets, computers or professional control panels.

This central control server integrates multiple channels of programmable serial communication, multiple programmable I/O channels, multiple programmable relay function modules, and multiple self-learning infrared control modules. The powerful self-learning function can effectively learn all infrared codes, making the remote control highly sensitive. Furthermore, it is equipped with a video card that can function as a small matrix with 4 inputs and 3 outputs.

Additionally, the Vunit3000 supports independent audio output for enhanced user experience.

The Vunit 3000 has complete functions and stable performance, providing an intelligent control experience. It is a winning choice for intelligent video conferences and multimedia conferences in exhibition centers, press conference rooms, monitoring and command centers, firefighting and more.

Certifications

CCC.

If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem. Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.

Features

- 32-bit ARM Cortex[®] industrial-grade CPU
 - Programmable weak-current relay connectors
 - Programmable COM connectors
 - Programmable I/O connectors
 - A comprehensive range of control connectors
 - Supports RS422 / RS485 / RS232 / modbus to control different serial communication devices.
 - Supports IR learning and is capable of saving and transmitting the learned IR commands.
 - IR emission connectors
 - HDMI 2.0 connectors
- Allows for the execution of various required functions through programmable triggers.

A single card can function as a small matrix with 4 inputs and 3 outputs.

- Audio connector

Independent audio output supported

- Multiple control options

The system allows for flexible control options by utilizing wireless or host network communication platforms such as iOS, Android, HarmonyOS, and Windows.

- Support the execution of multiple control tasks within a predetermined timeline.


- Open programmable system

The Vunit 3000 offers an open and programmable control platform, intuitive user interface, and interactive control structure. You can even customize images, icons and fonts according to your preferences.

- Edit and refine the control interface using a visualization UI design tool.
- This intelligent device is designed with fault-tolerant technologies and communication circuits with high anti-interference capabilities, ensuring high stability and reliability.


Appearance

Front Panel

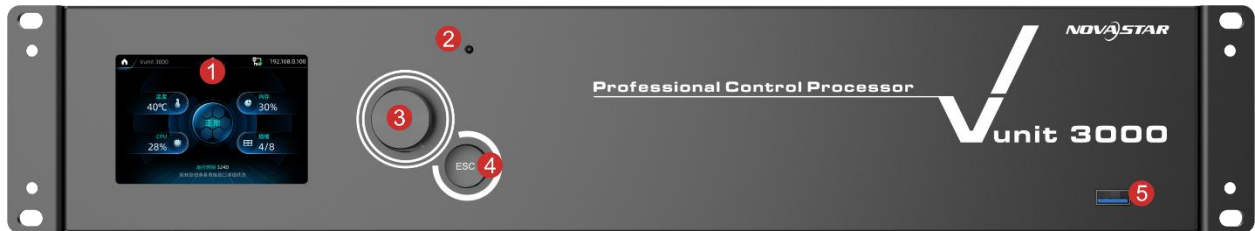

| No. | Name | Description |
|-----|------------|---|
| ① | LCD screen | <ul style="list-style-type: none"> • Operation interface • Display the connector status. |
| ② | IR-RX | IR receiving connector for IR learning |
| ③ | Knob | <ul style="list-style-type: none"> • Rotate the knob to select a menu item or adjust the parameter value. • Press the knob to confirm the setting or operation. |
| ④ | ESC | Exit the current menu or cancel an operation. |
| ⑤ | USB 3.0 | <ul style="list-style-type: none"> • Update the firmware via a USB drive. • Import and export project files. |


Rear Panel

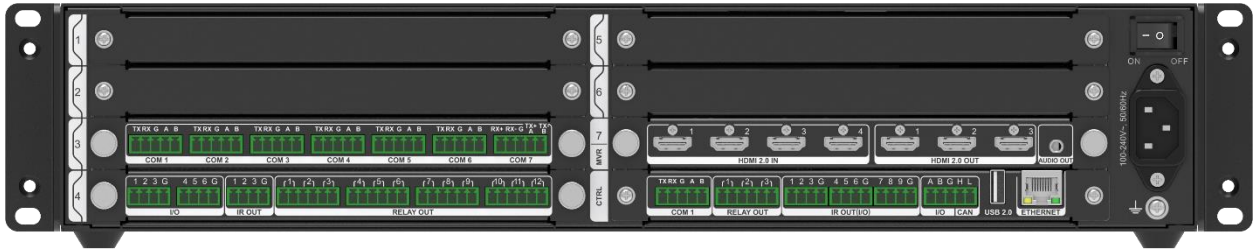


| Connector | Description |
|--------------|--|
| COM | <p>Phoenix connector</p> <ul style="list-style-type: none"> • Supports RS232 / RS422 / RS485 ports for input or output. • Supports three modes of the modbus protocol, including RTU, ASCII, TCP. <p>Note:</p> <p>The voltage conforms to the standard serial communication protocols.</p> |
| I/O | <p>I/O connector</p> <ul style="list-style-type: none"> • Allows for the execution of various required functions through programmable triggers. • Input and output modes supported • Output voltage: 5V, input voltage: 5V, max |
| RELAY OUT | <p>Light-current relay connectors</p> <p>Voltage: DC 30V, current: 3A</p> |
| IR OUT | <p>IR emission connectors</p> <p>Connect the IR emitter with the voltage below 5V.</p> |
| IR OUT (I/O) | <p>IR emission connector, which can be used as an I/O connector</p> <ul style="list-style-type: none"> • IR OUT <ul style="list-style-type: none"> – Infrared control supported – Trigger and send commands in base16 encoding. – Supports output only. • I/O connector <ul style="list-style-type: none"> – Supports programmable triggers. |

| Connector | Description |
|-----------|---|
| | <ul style="list-style-type: none"> - Supports input and output. - Input voltage: 5V, output voltage: 5V |
| ETHERNET | <ul style="list-style-type: none"> • Connect to the control PC for device control and update. • Work with BCTools and other visual control software to manage and operate central control devices, as well as the devices connected to the central control system. |
| HDMI IN | <p>4x HDMI 2.0 input connectors</p> <ul style="list-style-type: none"> • Input resolutions up to 3840×2160@60Hz • Backward compatible with HDMI 1.4a and HDMI 1.3 • Accompanied audio input supported • 8-bit and 10-bit processing supported • Video matrix switching via video card supported • EDID adjustment supported |
| HDMI OUT | <p>3x HDMI 2.0 output connectors</p> <ul style="list-style-type: none"> • Output resolutions up to 3840×2160@60Hz • Supports 8-bit/10-bit RGB4:4:4 / YCbCr4:4:4 / YCbCr2:2:2 output. • Accompanied audio output supported • The output resolution is the same as the input resolution. |
| Audio Out | <p>3.5 mm independent audio output</p> <p>Supports independent audio switching by switching between different input sources.</p> |

Applications

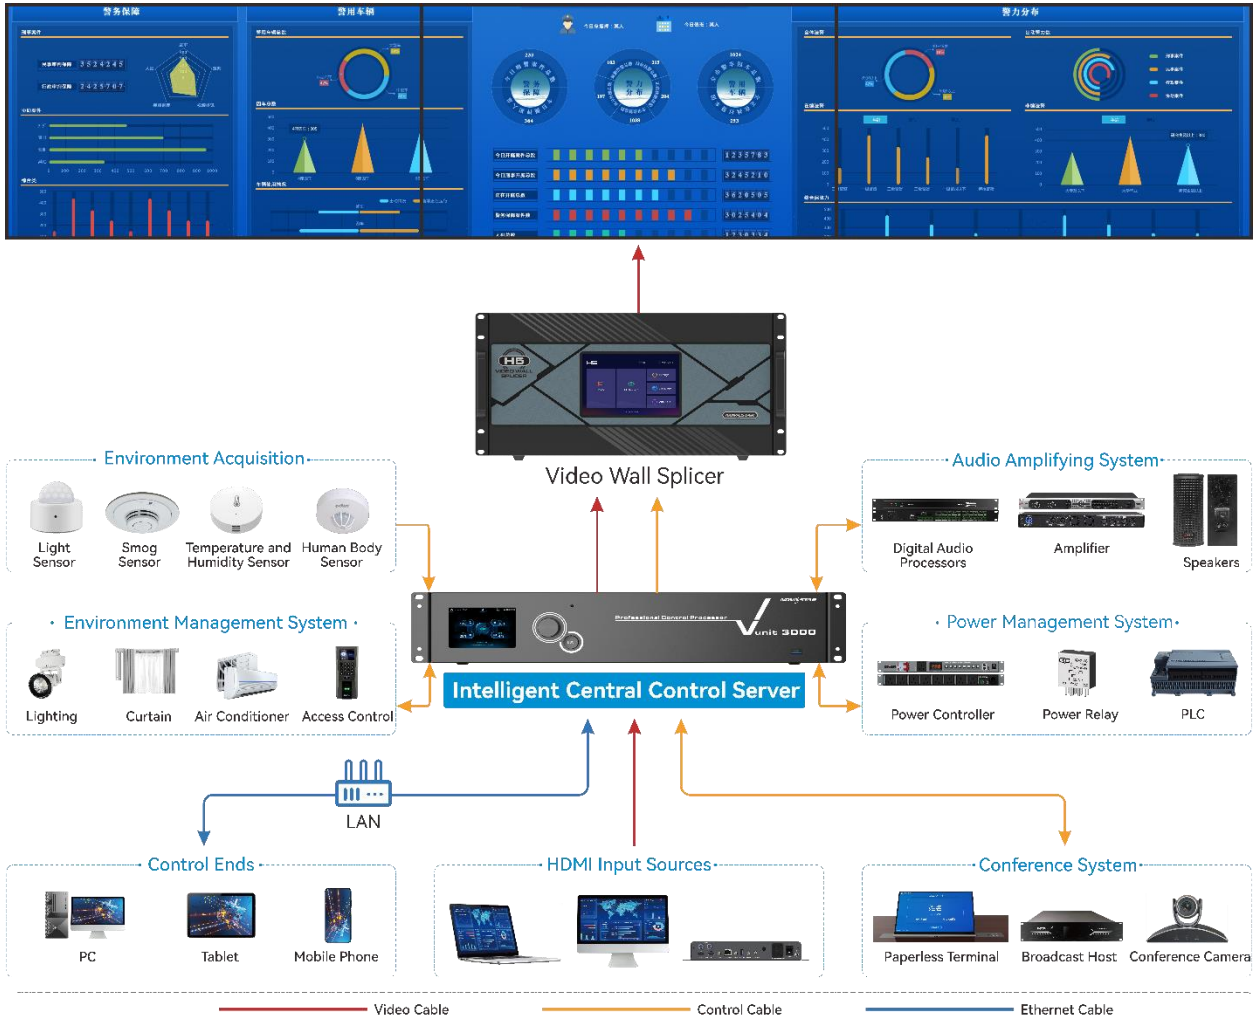

Dimensions

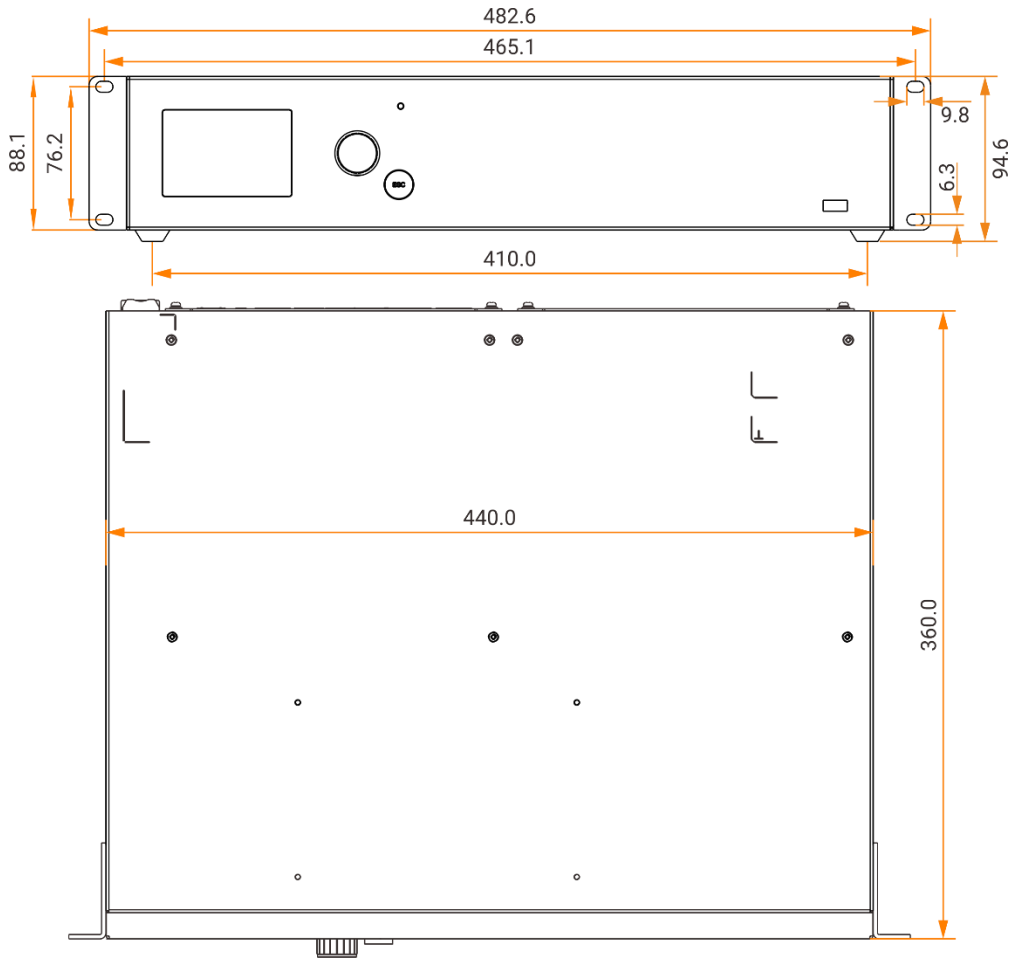

Tolerance: ± 0.3 Unit: mm

Specifications

| | | |
|----------------------------------|-----------------------|---------------------------------|
| Electrical Specifications | Input voltage | 100-240V~, 50/60Hz |
| | Max power consumption | 60W |
| Operating Environment | Temperature | 0°C to 45°C |
| | Humidity | 0% RH to 80% RH, non-condensing |
| Storage Environment | Temperature | -10°C to +60°C |
| | Humidity | 0% RH to 95% RH, non-condensing |

| | | |
|---|--------------|---|
| Physical Specifications | Dimensions | 482.6 mm × 360 mm × 94.6 mm |
| | Net weight | 11 kg (Full configuration) |
| | Gross weight | 12 kg (Full configuration) |
| Packing Information | Packing box | 660.0 mm × 570.0 mm × 210.0 mm |
| | Accessories | 1x Power cable, 1x Ethernet cable, 1x grounding cable, 3x IR emitters, 1x Safety Manual, 1x Certificate of Approval |
| Noise Level (typical at 25°C /77°F) | | 45 dB (A) |

Card Description

VIT_12xRELAY + 6xI/O + 3xIR Card

Appearance



Connectors

- 6x I/O
- 3x IR OUT
- 12x RELAY

I/O

- Allows for the execution of various required functions through programmable triggers.
- Input and output modes supported
- Input voltage: 5V, output voltage: 5V
- Pins 1, 2, 3, 4, 5 and 6 can be configured as input or output as desired, and pin G is the common grounding pin.

IR OUT

- Infrared control supported


- Output only
- Pins 1, 2 and 3 are used for infrared emission, and pin G is the common grounding pin for pins 1, 2 and 3.

RELAY

- Voltage: 30V DC; maximum current: 3A
- Output only
- Each group has two pins, which can be connected or disconnected programmatically.

VIT_7xCOM Card

Appearance

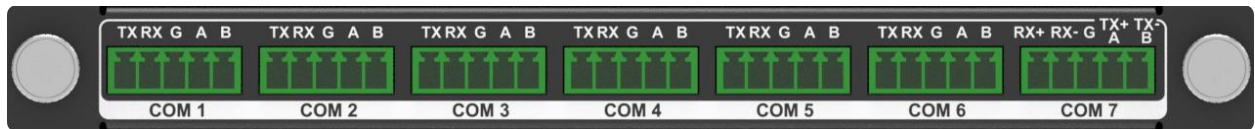


Connectors

- 7x COM
- COM1 to COM6 are compatible with RS232 / RS485 protocols for input and output.
- COM7 is compatible with RS422 / RS485 protocols for input and output.
- All RS485 ports are compatible with DMX512 protocol for DMX512 output.
- Supports three modes of the modbus protocol, including RTU, ASCII, TCP.
- Programmable full-duplex communication connectors

VIT_4xHDMI2.0 IN + 3x HDMI2.0 OUT Card

Appearance

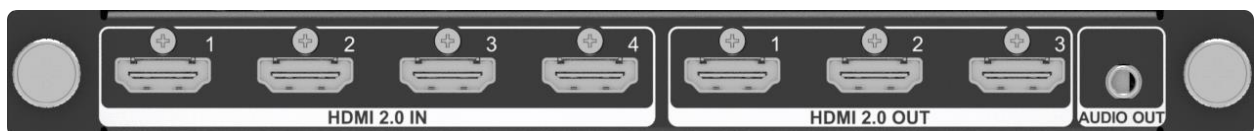

Connectors

- 4x HDMI 2.0 inputs
- 3x HDMI 2.0 outputs


- 1x 3.5 mm audio output

Specifications

- Supports input and output switching and a single card can function as the video matrix.
- Input and output resolutions up to 3840×2160@60Hz
- Backward compatible with HDMI 1.4a and HDMI 1.3
- Accompanied audio input supported
- 8-bit and 10-bit processing supported
- Video matrix switching via video card supported
- Input EDID adjustment supported
- Supports 8-bit/10-bit RGB4:4:4 / YCbCr4:4:4 / YCbCr2:2:2 output.
- The output resolution is the same as the selected input resolution.
- When the card is installed into the slot with the silkscreen marking "MVR", it can be used for monitoring inputs and outputs.

VIT_ Control Card

Appearance

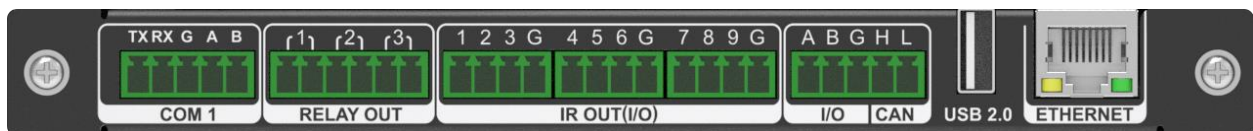

Connectors

- 1x COM
- 3x RELAY OUT
- 2x I/O
- 9x IR OUT (I/O)
- 1x CAN
- 1x USB 2.0
- 1x ETHERNET

COM

- Compatible with RS232 / RS485 protocols for input and output

- All RS485 ports are compatible with DMX512 protocol for DMX512 output.
- Supports three modes of the modbus protocol, including RTU, ASCII, TCP.
- Programmable full-duplex communication connectors

RELAY OUT

- Voltage: DC 30V, current: 3A
- Six pins are divided into three groups, which can be connected or disconnected programmatically.

I/O

- Allows for the execution of various required functions through programmable triggers.
- Input and output modes supported
- Output voltage: 5V, input voltage: 5V, max
- Pins A and B can be configured as input or output as desired, and pin G is the common grounding pin for pins A and B.

IR OUT (I/O)

IR emission connector, which can be used as an I/O connector

- IR OUT
 - Connect the IR emitter with the voltage below 5V.
 - Infrared control supported
 - Trigger and send commands in base16 encoding.
 - Supports output only.
 - Pins 1 to 9 are used for infrared emission, and pin G is the common grounding pin for pins 1, 2 and 3.
- I/O connector
 - Supports programmable triggers.
 - Supports input and output.
 - Input voltage: 5V, output voltage: 5V

CAN

- Supports access and control of the device adopting CAN protocol.
- Programmable full-duplex communication connectors

- Update the firmware via USB drive.
- Import and export the project file.

ETHERNET

- Gigabit Ethernet port
 - 10/100/1000Mbps supported
 - Supports both TCP and UDP.
- Connect to the control PC for firmware update and configure the device via the control PC.
- Send central control project files using a visualization UI design tool.

Copyright © 2024 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

NOVA STAR is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

| [Official website](http://www.novastar.tech)
| www.novastar.tech

| [Technical support](mailto:support@novastar.tech)
| support@novastar.tech