NOVASTAR

ET1S-G

Media Server

Quick Start Guide

---

1 Appearance

Front Panel

Power Button
Power on or power off the device.

Media Server

USB Ports
Connect the mouse, keyboard or USB drive.

Rear Panel

Power Switch

Output Connectors

RJ45 Ethernet Port
Connect the device to the network.

Audio Connectors

ON OFF | DP1.2 HDMI 2.0/1.3 HDMI 1.3 HDMI 1.3 HDMI 1.3 | CONTROL UI | ETHERNET | MIC LINE OUT | 3 4

Power Connector

HDMI Connector
Connect the monitor for displaying the software UI.

USB Ports
Connect the mouse, keyboard or USB drive.

* The product pictures shown in this guide are for illustration purpose only. Actual product may vary.

---

2 Applications

1x 4K Output / 4x 2K Outputs

Media Files

Media Server

Monitor

Laser Pointer   Keyboard   Mouse   Router   VICP
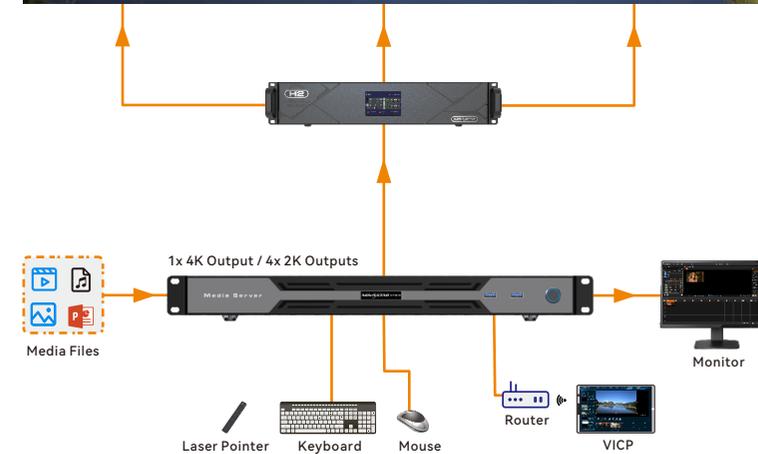
3 Software Operations

The ET1S-G integrates Kompass FX1 multimedia playback software, with various operations such as adding media, editing and playing programs.

3.1 Add Media Files

Kompass FX1 supports batch file import and folder import. You can import the media files via the following methods:

- Directly drag single media file, multiple media files or folders into **Media Library** to automatically add the media.
- Click ![icon] in the lower-left corner of **Media Library**, then select to add a local file or folder to proceed with the import.

Drag media here

Add media files or folders
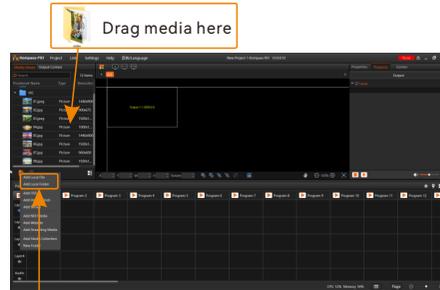
Note

The user interface and functionality may vary depending on the actual version of Kompass FX1 you have obtained.

3.2 Edit Programs

1. Select the target media file in **Media Library** and drag it to the desired layer in a program or the stage editing area.
2. Drag and drop the layers in the stage editing area to quickly adjust their position. Drag the eight dots at the edges of the layers to quickly resize them.
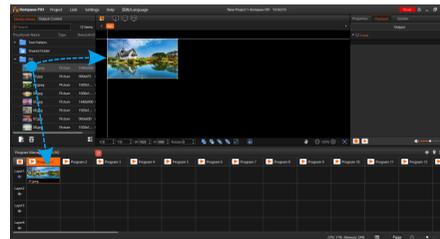
3. Click the layer and set its playback properties in the **Properties** area on the right.
4. Edit the remaining layers of the program one by one to complete the editing of the current program.
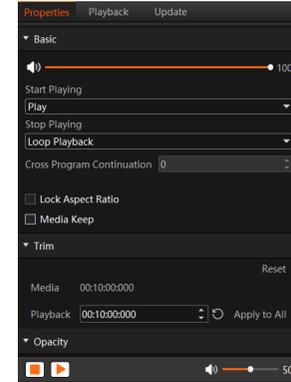
3.3 Play Programs

After completing the layer editing, click the button to the left of the program name to play the program as you like.

- ▶ Play the program.
- ⏸ Pause the program playback.
- ⏹ Stop playing all the programs.
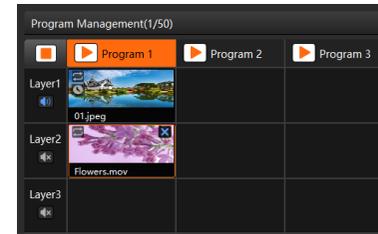
Playback Control

You can pause and play of individual layers in the **Playback** area on the right.

Click ⏸ to the right of the layer to pause the playback.
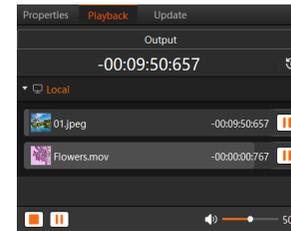
Program Jump

Right click a program to open the context menu and select **After Program Ends** where you can set the action after the current program ends to manually sort the playback order.

Main Media: Set which layer is used as the main media. The playback timing and program switching are all based on the main media.
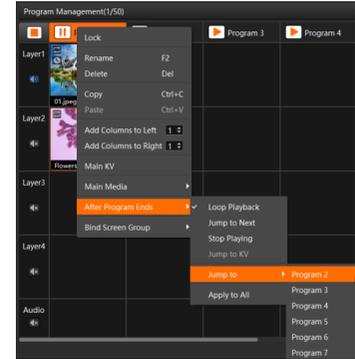
3.4 App Control

The ET1S-G supports control via an App named Visual Intelligent Control Platform (VICP), you need to enable the listening port for the external control.

1. In Kompass FX1, navigate to **Settings** > **External Control** to open the external control window.
2. Select the **Network** tab and check the box in front of **TCP/IP**.
3. Enter the listening port number in the text box next to **Port**.
   The value ranges from 1024 to 65535.
4. Click **Listen** to enable the listening.

Note

For operation methods when using the App, please refer to the user manual of the App in advance.

*The software pictures given in this guide are used for illustration purposes only. The actual user interface may vary slightly due to product enhancement. The content of the pictures can be slightly different from reality, such as the media files, form and position of software windows and more.