

# TB30

## Multimedia Player



Specifications

## Change History

Document Version	Release Date	Description
V1.2.1	2024-10-20	Updated the feature description.
V1.2.0	2024-07-24	<ul style="list-style-type: none"> <li>• Updated the feature description.</li> <li>• Updated the RUN indicator description.</li> <li>• Added the recommended supply power.</li> <li>• Updated the packing information.</li> <li>• Updated the media decoding specifications.</li> </ul>
V1.1.0	2024-05-30	<ul style="list-style-type: none"> <li>• Updated the introduction.</li> <li>• Updated the feature description.</li> <li>• Updated the connector description.</li> <li>• Updated the media decoding specifications.</li> </ul>
V1.0.7	2023-09-28	<ul style="list-style-type: none"> <li>• Changed the description of the default Wi-Fi AP password.</li> <li>• Changed the internal storage capacity from 16 GB to 32 GB.</li> </ul>
V1.0.6	2023-06-14	Updated the connector descriptions.
V1.0.5	2022-11-18	Updated the certification information.
V1.0.4	2022-06-10	<ul style="list-style-type: none"> <li>• Added a description of RF synchronization.</li> <li>• Added notes and cautions.</li> <li>• Updated the certification information.</li> <li>• Updated the indicator descriptions.</li> <li>• Updated the accessory descriptions.</li> </ul>
V1.0.2	2021-12-17	<ul style="list-style-type: none"> <li>• Updated the descriptions of the USB (Type B) port and Gigabit Ethernet port.</li> <li>• Added the gross weight of the product.</li> <li>• Added a note for the power consumption.</li> </ul>
V1.0.1	2021-09-30	<ul style="list-style-type: none"> <li>• Added certification information.</li> <li>• Updated the description of the playback performance.</li> <li>• Added net weight.</li> </ul>
V1.0.0	2021-08-31	First release

## Introduction

The TB30 is a new generation of multimedia player created by NovaStar for full-color LED displays. This multimedia player integrates playback and sending capabilities, allowing users to publish content and control LED displays with a computer, mobile phone, or tablet. Working with our superior cloud-based publishing and monitoring platforms, the TB30 enables users to manage LED displays from an Internet-connected device anywhere, anytime.

Thanks to its reliability, ease of use, and intelligent control, the TB30 becomes a winning choice for commercial LED displays and smart city applications such as fixed displays, lamp-post displays, chain store displays, advertisement players, retail store displays, door head displays, shelf displays, and much more.

## Certifications

NBTC, IMDA, PSB, FAC DoC, ENACOM, ICASA, SRRC, NOM-208, EAC DoC, EAC RoHS, RCM, Smark, CQC, FCC, UL, IC, KC, CE, UKCA, CB, MIC, PSE

**If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem.**

**Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.**

## Features

### Output

- Loading capacity up to 650,000 pixels

Maximum width: 4096 pixels, maximum height: 4096 pixels

- 2x Gigabit Ethernet ports

One serves as primary and the other as backup.

- 1x Stereo audio connector

The audio sample rate is fixed at 48 kHz. If NovaStar's multifunction card is used for audio output, audio with a sample rate of 48 kHz is required.

## Input

- 2x sensor connectors  
Connect to the brightness sensor or temperature and humidity sensor.

## Control

- 1x USB 3.0 (Type A) port  
Allows for USB playback, firmware upgrade and storage expansion.
- 1x USB (Type B) port  
Connects to the control computer for content publishing and screen control.
- 1x Gigabit Ethernet port  
Connects to the control computer, a LAN or public network for content publishing and screen control.

## Performance

- Powerful processing capacity
  - Quad-core ARM A55 processor @1.8 GHz
  - Support for H.264/H.265 4K@60Hz video decoding
  - 1 GB of onboard RAM
  - 32 GB of internal storage
- Flawless playback  
Support for playback of 1x 4K, 2x 1080p, 4x 720p, 4x 480p, or 6x 360p videos

## Functionality

- All-round control plans
  - Enables users to publish content and control screens from a computer, mobile phone, or tablet.
  - Allows users to publish content and control screens from anywhere, anytime.
  - Allows users to monitor screens from anywhere, anytime.
- Wi-Fi AP and Wi-Fi Sta can be turned on at the same time

- W-Fi AP

User terminal devices can connect to the built-in Wi-Fi hotspot of the multimedia player. The default SSID is “AP+ *Last 8 digits of SN*” and the default password is printed on the SSID label.

- Wi-Fi AP+Wi-Fi Sta

Users can connect the multimedia player to a Wi-Fi network and turn on the Wi-Fi hotspot at the same time.

- Synchronous playback across multiple screens

Enabling synchronous playback halves the number of videos that can be played simultaneously within the decoding capability of the device.

- NTP time synchronization

- GPS time synchronization (The specified 4G module must be installed.)

- RF time synchronization (The specified RF module must be installed.)

- Support for 4G/5G modules

The device ships without a 4G/5G module. Users have to purchase 4G/5G modules separately if needed.

Network connection priority: Wired network > Wi-Fi network > 4G/5G network (This order of priority is followed when the firmware is earlier than V4.5.0. The networks coexist when the firmware is V4.5.0 or later.)

## Appearance

### Front Panel




Name	Description
SIM CARD	SIM card slot Capable of preventing users from inserting a SIM card in the wrong orientation.
RESET	Factory reset button Press and hold this button for 5 seconds to reset the product to its factory settings.

Name	Description
USB	USB (Type B) port Connects to the control computer for content publishing and screen control.
LED OUT	Gigabit Ethernet outputs

## Rear Panel




Name	Description
SENSOR	Sensor connectors Connect to the brightness sensor or temperature and humidity sensor.
	Reserved RF antenna connector
WiFi	Wi-Fi antenna connector (2.4 GHz Wi-Fi supported) Support for switching between Wi-Fi AP and Wi-Fi Sta
ETHERNET	Gigabit Ethernet port Connects to the control computer, a LAN or public network for content publishing and screen control.
COM 2	GPS antenna connector
USB 3.0	USB 3.0 (Type A) port Allows for USB playback, firmware upgrade and storage expansion. The Ext4 and FAT32 file systems are supported. The maximum size of a single file supported by FAT32 is 4 GB. The exFAT and FAT16 file systems are not supported.
COM 1	4G antenna connector
AUDIO OUT	Audio output connector OMTP headphones can be connected.
100-240V~, 50/60Hz, 0.6A	Power input connector
ON/OFF	Power switch

## Indicators

Name	Color	Status	Description
PWR	Red	Staying on	The power supply is working properly.
SYS	Green	Flashing once every 2s	The operating system is functioning normally.
		Staying on/off	The operating system is malfunctioning.
CLOUD	Green	Staying on	The device is connected to the Internet and the connection is available.
		Flashing once every 2s	The device is connected to VNNOX and the connection is available.
		Flashing once every second	The device is upgrading the operating system.
		Flashing once every 0.5s	The device is copying the upgrade package.
RUN	Green	Flashing once every 2s	The FPGA has no video source.
		Flashing once every 0.5s	The FPGA is functioning normally.
		Staying on/off	The FPGA loading is abnormal.

## Dimensions

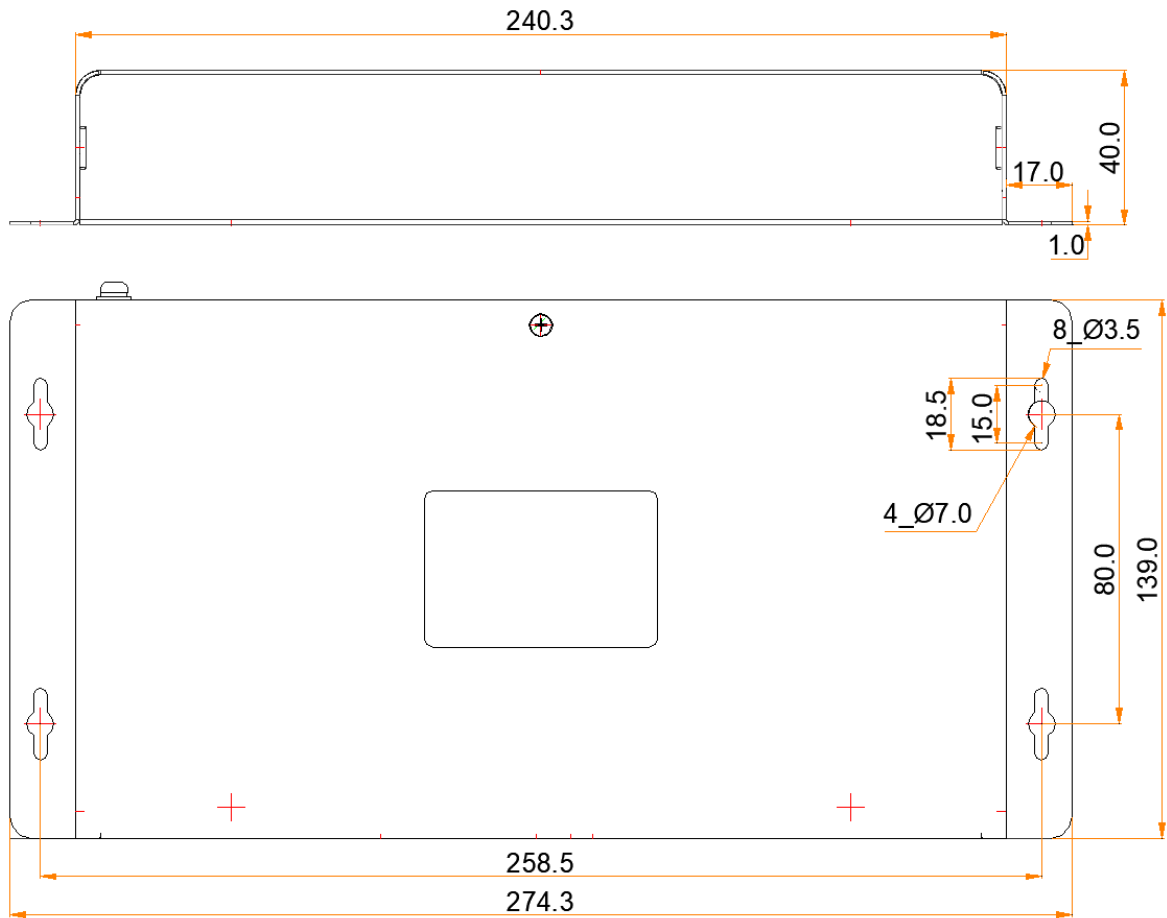

Tolerance:  $\pm 0.3$  Unit: mm

## Specifications

Electrical Parameters	Input power	100~240V~, 50/60Hz, 0.6A
	Maximum power consumption	18 W
	Recommended supply power	25 W
Storage Capacity	RAM	1 GB
	Internal storage	32 GB
Operating Environment	Temperature	-20°C to +60°C
	Humidity	0% RH to 80% RH, non-condensing



Storage Environment	Temperature	-40°C to +80°C
	Humidity	0% RH to 80% RH, non-condensing
Physical Specifications	Dimensions	274.3 mm × 139.0 mm × 40.0 mm
	Net weight	1228.9 g
	Gross weight	1648.5 g Note: It is the total weight of the product, accessories and packing materials packed according to the packing specifications.
Packing Information	Dimensions	385.0 mm × 280.0 mm × 75.0 mm
	Accessories	<ul style="list-style-type: none"> <li>• 1x Wi-Fi omnidirectional antenna</li> <li>• 1x AC power cord</li> <li>• 1x Quick Start Guide</li> <li>• 1x Certificate of Approval</li> </ul>
IP Rating	IP20 Please prevent the product from water intrusion and do not wet or wash the product.	
System Software	<ul style="list-style-type: none"> <li>• Android 11.0 operating system software</li> <li>• Android terminal application software</li> <li>• FPGA program</li> </ul> Note: Third-party applications are not supported.	

The amount of power consumption may vary depending on various factors such as product settings, usage, and environment.

## Media Decoding Specifications

### Image

Codec	Max Resolution	Format	Remarks
JFIF file format 1.02	4096×2160 pixels	JPG, JPEG	No support for non-interlaced scan Support for SRGB JPEG Support for Adobe RGB JPEG
BMP	4096×2160 pixels	BMP	N/A

Codec	Max Resolution	Format	Remarks
GIF	4096×2160 pixels	GIF	N/A
PNG	4096×2160 pixels	PNG	N/A
WEBP	4096×2160 pixels	WEBP	N/A

## Video

Codec	Resolution	Max Frame Rate	Max Bit Rate (Ideal Case)	Format	Remarks
MPEG-1/2	48×48 pixels to 1920×1088 pixels	30fps	80Mbps	DAT, MPG, VOB, TS	Support for Field Coding
MPEG4	48×48 pixels to 1920×1088 pixels	30fps	38.4Mbps	AVI, MKV, MP4, MOV, 3GP	No support for MS MPEG4 v1/v2/v3 and GMC
H.264	16×16 pixels to 4096×2304 pixels	2304p@30fps	80Mbps	AVI, MKV, MP4, MOV, 3GP, TS, FLV	Support for Field Coding, MBAFF, and High&High 10 Profile
H.264 MVC	16×16 pixels to 4096×2304 pixels	2304p@30fps	100Mbps	MKV, TS	Support for Stereo High Profile only
H.265/HEVC	64×64 pixels to 4096×2304 pixels	2304p@60fps	100Mbps	MKV, MP4, MOV, TS	Support for Main & Main 10 Profile and Tile & Slice
VP8	48×48 pixels to 1920×1088 pixels	30fps	38.4Mbps	WEBM, MKV	N/A
VP9	64×64 pixels to 4096×2304 pixels	60fps	80Mbps	WEBM, MKV	N/A
H.263	SQCIF(128×96) QCIF(176×144) CIF(352×288) 4CIF(704×576)	30fps	38.4Mbps	3GP, MOV, MP4	No support for H.263+

Codec	Resolution	Max Frame Rate	Max Bit Rate (Ideal Case)	Format	Remarks
MJPEG	48×48 pixels to 1920×1088 pixels	60fps	60Mbps	AVI	N/A

## Notes and Cautions

### FCC Caution

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

## IC Caution

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: 1) L'appareil ne doit pas produire de brouillage; 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with Industry Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme à l'exposition aux rayonnements Industry Canada limites établies pour un environnement non contrôlé.

### **Radiation Exposure Statement**

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé. Cet équipement doit être installé et utilisé à distance minimum de 20cm entre le radiateur et votre corps.

## Cautions

This is Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

## Copyright

**Copyright © 2024 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.**

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

### Trademark

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

### Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

Official website  
[www.novastar.tech](http://www.novastar.tech)

Technical support  
[support@novastar.tech](mailto:support@novastar.tech)